
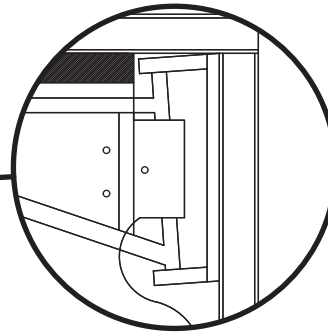


DOUBLE ACTING "FLEXIBLE" TRAFFIC DOOR

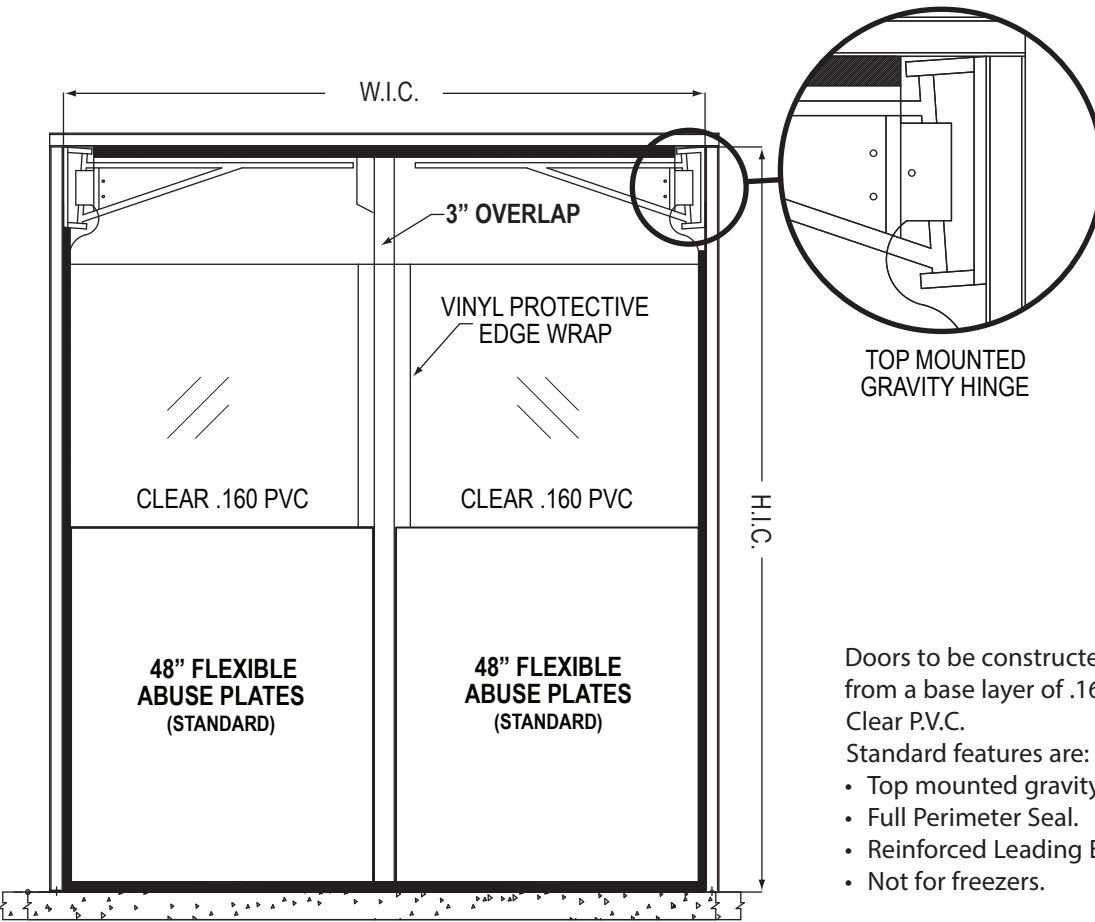

TOP MOUNTED GRAVITY HINGE

Doors to be constructed from a base layer of .160 Clear P.V.C.
 Standard features are:

- Top mounted gravity hinges.
- Full Perimeter Seal.
- Reinforced Leading Edge.
- Not for freezers.



SDSS (STND.) STAINLESS STEEL

National ACCESS DESIGN LLC
 513-351-3400 fax: 866-300-4539 sales@nationalaccessdesign.com
 NationalAccessDesign.com

DOOR SPECIFICATION

Opening Width _____ x Height _____

Qty. _____

BI-PARTING

SINGLE PANEL

L

R

COLOR OPTIONS

BLACK

IMPACT PLATES

B24 (24")

B36 (36")

B48 (48") STANDARD

IMPACT PLATES - H.D.P.E. RIGID POLYETHYLENE

B24 (24")

B36 (36")

B48 (48") STANDARD

HINGES

SDSS Stainless Steel (STND)

HDSS Stainless Steel (Heavy Duty)

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD-1600 FLEX DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.