DOUBLE ACTING SHEET DOORS

W.I.C.

.063 SATIN ANODIZED ALUMINUM
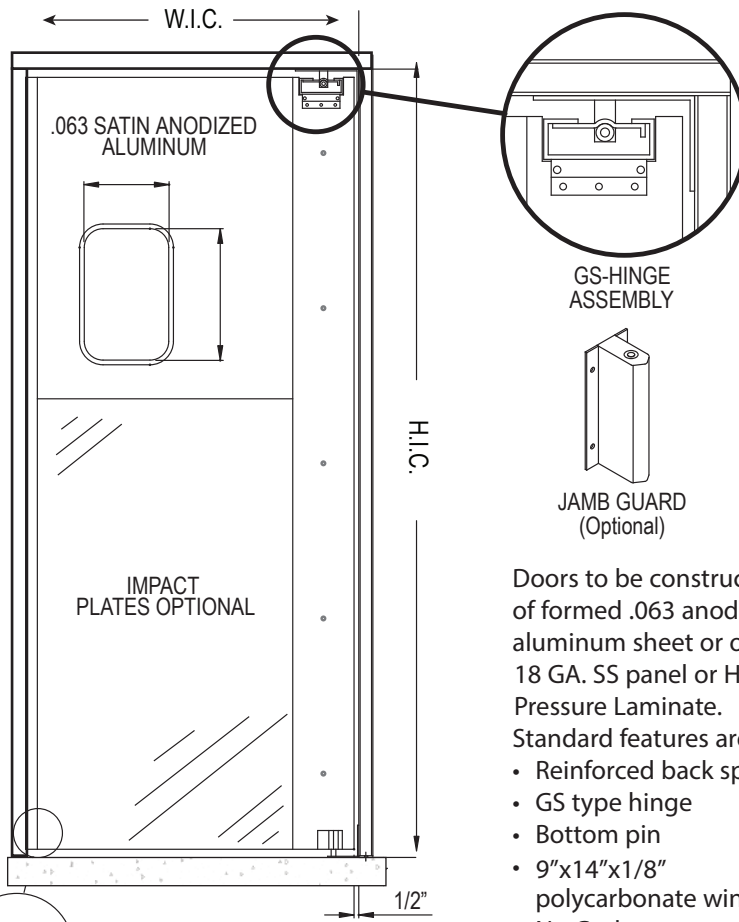
H.I.C.

IMPACT PLATES OPTIONAL

1/2"

GS-HINGE ASSEMBLY

JAMB GUARD (Optional)

Doors to be constructed of formed .063 anodized aluminum sheet or optional 18 GA. SS panel or High Pressure Laminate.

Standard features are:
• Reinforced back spine
• GS type hinge
• Bottom pin
• 9"x14"x1/8" polycarbonate window
• No Gasket

FORMED EDGE

STAINLESS STEEL IMPACT PLATE

BOTTOM PIN (STD)

BACK SPINE

*CAFE DOOR ON SEPARATE SPEC SHEET.

Updated: 2/13/2024

DOOR SPECIFICATION

Opening Width _____ x Height _____

Qty. _____

SINGLE PANEL
L   R

MATERIAL
.063 ANODIZED ALUMINUM (STANDARD) - 5000
18 GA. STAINLESS STEEL PANEL - 5000SS
PRESSURE LAMINATE - 5000HPL
Manufacturer _____
Stock # _____
Color # _____

IMPACT PLATE OPTIONS
ABS   18 GA. STAINLESS STEEL

PL12"   PL24"
PL36"   PL48"

WINDOW SIZES
6"x12"   9"x14"   14"x16"
10"x30"   22"x22"

HARDWARE OPTIONS
BOTTOM PIN (STANDARD

JG-10 (10")

SSGS HINGE - STAINLESS STEEL HINGE w/ BOTTOM PIN

NAD 5000 - SS - HPL SHEET DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.