




DOUBLE ACTING "RIGID" TRAFFIC DOOR

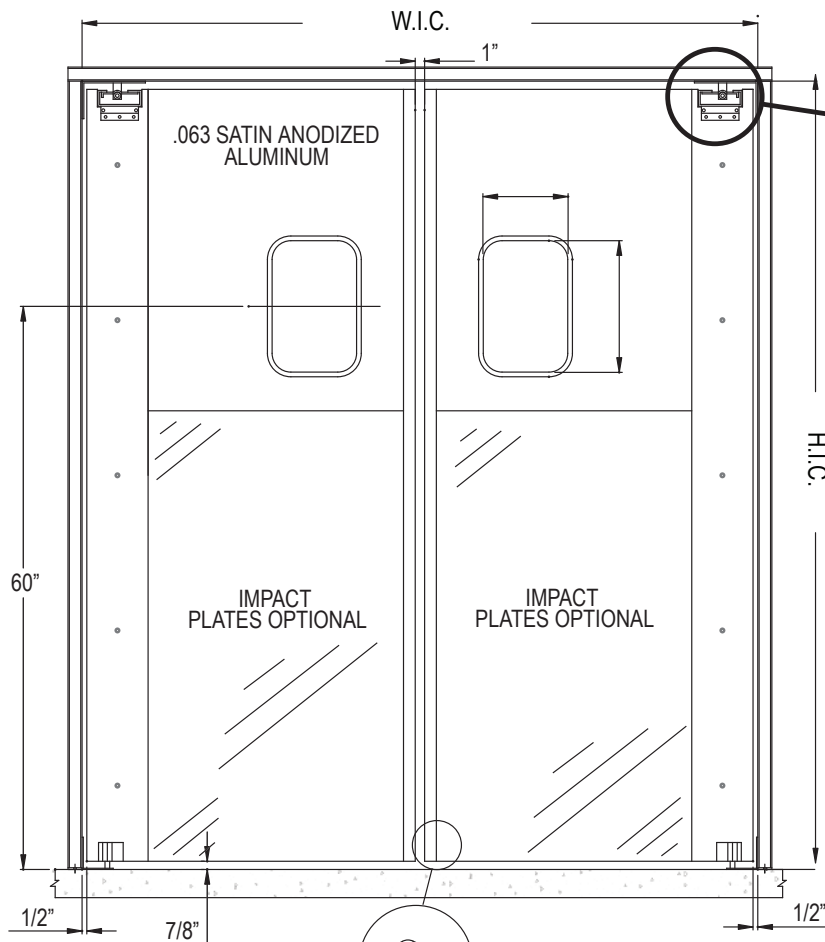

GS-HINGE ASSEMBLY




JAMB GUARD (Optional)


Doors to be constructed of formed .063 anodized aluminum sheet or optional 18 GA. SS panel or High Pressure Laminate.

Standard features are:


- Reinforced back spine
- GS type hinge
- Bottom pin
- 9"x14"x1/8" polycarbonate window
- No Gasket



FORMED EDGE



BACK SPINE



STAINLESS STEEL IMPACT PLATE



BOTTOM PIN (STD)

*CAFE DOOR ON SEPARATE SPEC SHEET.

Updated: 4/9/2025

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____
Date: _____

National ACCESS DESIGN LLC
 513•351•3400 fax: 866•300•4539
 sales@NationalAccessDesign.com

DOOR SPECIFICATION
 Opening Width _____ x Height _____
 Qty. _____
 BI-PARTING SINGLE PANEL
 L R

MATERIAL
 .063 ANODIZED ALUMINUM (STANDARD) - 5000
 18 GA. STAINLESS STEEL PANEL - 5000SS
 PRESSURE LAMINATE - 5000HPL
 Manufacturer _____
 Stock # _____
 Color # _____

IMPACT PLATE OPTIONS

ABS	18 GA. STAINLESS STEEL
PL12"	PL24"
PL36"	PL48"

WINDOW SIZES

6"x12"	9"x14"	14"x16"
10"x30"	22"x22"	

HARDWARE OPTIONS

BOTTOM PIN (STANDARD)
 JG-10 (10")
 SSGS HINGE

NAD 5000 - SS - HPL SHEET DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.