



# DOUBLE ACTING "RIGID" TRAFFIC DOOR

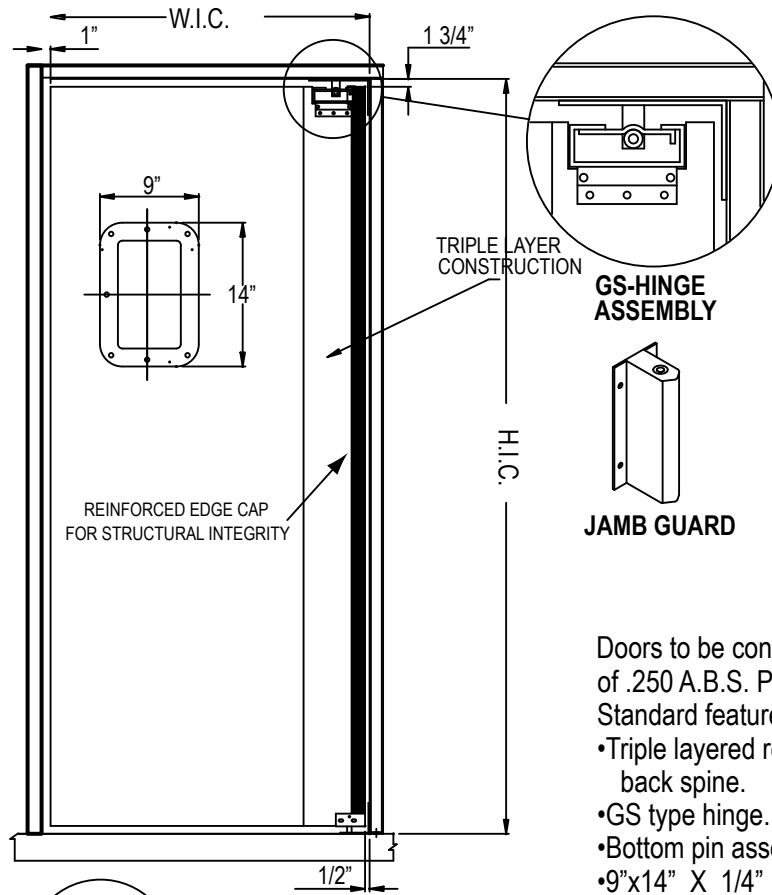

**GS-HINGE ASSEMBLY**



**JAMB GUARD**

REINFORCED EDGE CAP FOR STRUCTURAL INTEGRITY

TRIPLE LAYER CONSTRUCTION

Doors to be constructed of .250 A.B.S. Plastic Sheet. Standard features are:


- Triple layered reinforced back spine.
- GS type hinge.
- Bottom pin assembly.
- 9"x14" X 1/4" Acrylic Window Set In A.B.S. Frames.
- Not gasketed.



**END SECTION**



**BOTTOM PIN (STND.)**



**(OPTIONAL) PLASTIC IMPACT PLATES**

**National ACCESS DESIGN LLC**  
 (513) 351-3400      nadllc@fuse.net  
 www.nationalaccessdesign.com

**DOOR SPECIFICATION**  
 Opening Width \_\_\_\_\_ x Height \_\_\_\_\_  
 Qty. \_\_\_\_\_

SINGLE PANEL  
L      R

**STANDARD COLORS .250 ABS**  
 BLACK      WHITE  
 BEIGE  
 \* OTHER COLORS CONSULT FACTORY

**IMPACT OPTIONS (BLACK ABS STANDARD)**  
 PL12"      PL18"      PL24"  
 PL30"      PL36"      PL48"

**WINDOW SIZES (ABS FRAMES)**  
 6"x12"      9"x14" (STANDARD)  
 10"x30"      14"x16"  
 22" x22"

**HARDWARE OPTIONS**  
 BOTTOM PIN (STANDARD)  
 SSGS HINGE W/ BOTTOM PIN  
 JG-10 (10")

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: \_\_\_\_\_  
 Date: \_\_\_\_\_

<b>NAD-6000</b>
JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. P.O. NO.

\*Cafe door on separate spec sheet.