
DOUBLE ACTING "RIGID" TRAFFIC DOOR



Doors are constructed of a 1/2" thick polyethylene H.D.P.E. sheet. Standard features are:

- 3/16" thick custom aluminum U-Channel
- Bottom pin assembly
- 9"x14" 1/4"acrylic window set in a custom rubber extrusion.
- GS type hinge.

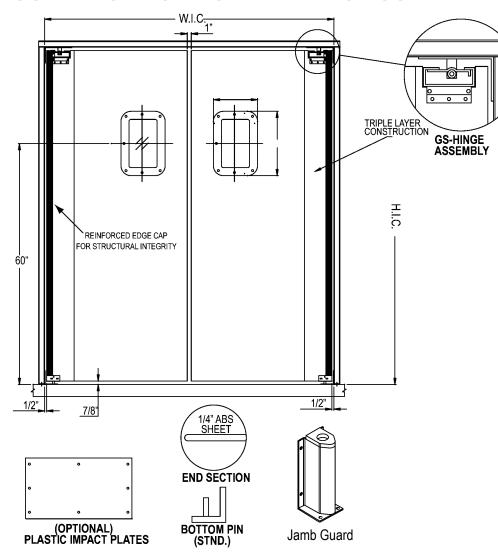

DOOR SPECIFICA	ATION
Opening Width	x Height
Qty	
BI-PARTING	SINGLE PANEL
	L R
STANDARD COLO	ORS .250 ABS
BLACK	WHITE

IMPACT OPTIONS (BLACK ABS STANDARD)

PL12" PL18" PL24" PL48" PL30" PL36"

WINDOW SIZES (ABS FRAMES)

9"x14" (STANDARD) 6"x12" 10"x30" 14"x16" 22" x22"

HARDWARE OPTIONS

BOTTOM PIN (STANDARD) SSGS HINGE W/ BOTTOM PIN JG-10 (10")

Charges will be assumed by buyer for changes
or cancellations to work in process. Buyer hereby
accepts responsibility for all sizes and dimensions
This order will not be processed until all
acknowledgement forms are signed and returned.
<u> </u>

*Cafe door on separate spec sheet.

accepts responsibility for all sizes and dimension This order will not be processed until all acknowledgement forms are signed and returned
Specification accepted by:
Date:

NAD-6000 JOB NAME/LOCATION **CUSTOMER/LOCATION** CUST. ORDER NO. CUST. P.O. NO.

UPDATED: 3/10/2025