



DOUBLE ACTING "INSULATED" TRAFFIC DOOR

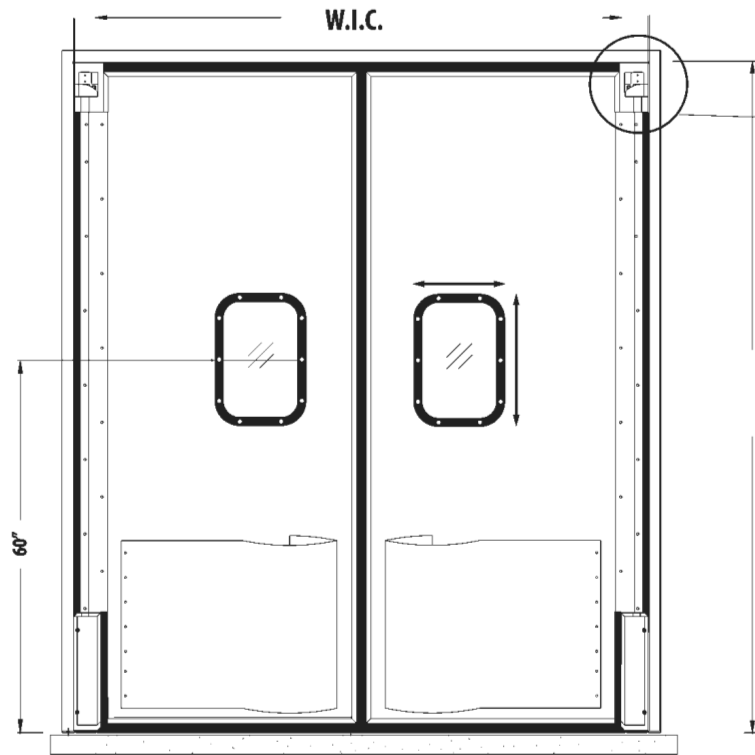


V-CAM ASSEMBLY ASSEMBLY (OPTIONAL)


Doors to be constructed from a custom rigid P.V.C. interior tubing with an aluminum extrusion and thermo-plastic facings.

Standard features are:


- Bottom 10" Jamb Guard.
- 9"x14" Vacuum formed window frames.
- Fully insulated, 1 3/4" thick panels.




10" JAMB GUARDS



PLASTIC IMPACT PLATE



CANE BOLTS



FB-TEARDROP BUMPER



LOCKING COLLAR

National ACCESS DESIGN LLC

513-351-3400

fax: 866-300-4539

sales@NationalAccessDesign.com

DOOR SPECIFICATION

Opening Width _____ x Height _____

Quantity _____

BI-PARTING	SINGLE PANEL
	L R

THERMOPLASTIC FACINGS COLOR OPTIONS

BLACK	WHITE	BROWN
BEIGE	DK.GRAY	GREEN
CANYON BLUE	LT.GRAY	RED

TEARDROP BUMPERS (BLACK HDPE STANDARD)

FB12"	FB18"	FB24"	FB30"
FB36"	FB42"	FB48"	

IMPACT PLATES (BLACK ABS STANDARD)

PL12"	PL18"	PL24"	
PL30"	PL36"	PL42"	PL48"

WINDOW SIZES

10"x30"	9"x14" (STD)
14"x16"	22"x22"

HARDWARE OPTIONS

WASHDOWN PACKAGE

CANE BOLTS
LOCKING COLLARS
ALL STAINLESS STEEL

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD 8500

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. P.O. NO.