

DOUBLE ACTING TRAFFIC DOORS

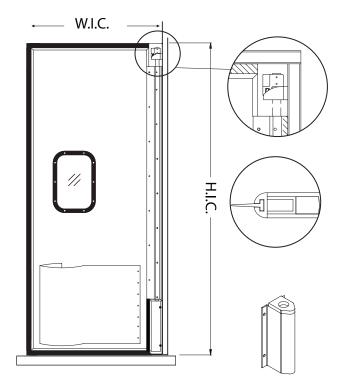


Doors to be constructed from welded high strength aluminum infrastructure with thermo-plastic facings. Standard features are:

- V-cam hinge
- 10" Zinc Jamb Guards
- 9"x14" Vacuum formed Window Frames
- Full height reinforced hinge structure
- Fully insulated 1 3/4" thick panels
- Full Perimeter Seals
- Interior + Exterior Alum. Diamond Kick Plates

*CAFE DOOR ON SEPARATE SPEC SHEET.



LOCKING COLLAR CANE BOLTS



SPRING COMPENSATOR
Updated: 2/15/2024 For V-CAMS

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by:	
Date:	



513-351-3400 fax: 866-300-4539 sales@nationalaccessdesign.com

NationalAccessDesign.com

DOOR SPECIFICATI Opening Width Qty		t		
Qty	SIN	GLE PANI	≣L	
	L	R		
THERMOPLASTIC F	ACINGS COLO	OR OPTIC	NS	
WHITE				
CANYON BLUE			RED	
GREEN	LT. GR	AY	DK.GRAY	
IMPACT PLATES (ST	TANDARD BL	ACK ABS))	
PL12"	PL18"		PL24"	
PL30" PL48"	PL36"		PL42"	
TEARDROP BUMPE	R (STANDAR	D BLACK	HDPE	
FB12"	FB18"	FB24"	FB30"	
FB36"	FB42"	FB48"		
OPTIONAL FACING				
20 GA. STAINLESS STEEL				
18 GA. GALVAN		DIATE		
ALUMINUM DIA	MOND IKEAL	PLATE		
WINDOW SIZES				
9"x14" 14				
22"x 22" 10	″x30″			
HARDWARE OPTIO JG-10 (10" STAI SPRING COMPE	NDARD)	CANE	201 TS	
LOCKING COMPL		CANL	JOLIJ	

NAD Model 9500
JOB NAME/LOCATION
CUSTOMER/LOCATION
CUST. ORDER NO.
CUST. PO ORDER NO.