


DOUBLE ACTING "INSULATED" ENERGY TRAFFIC DOOR

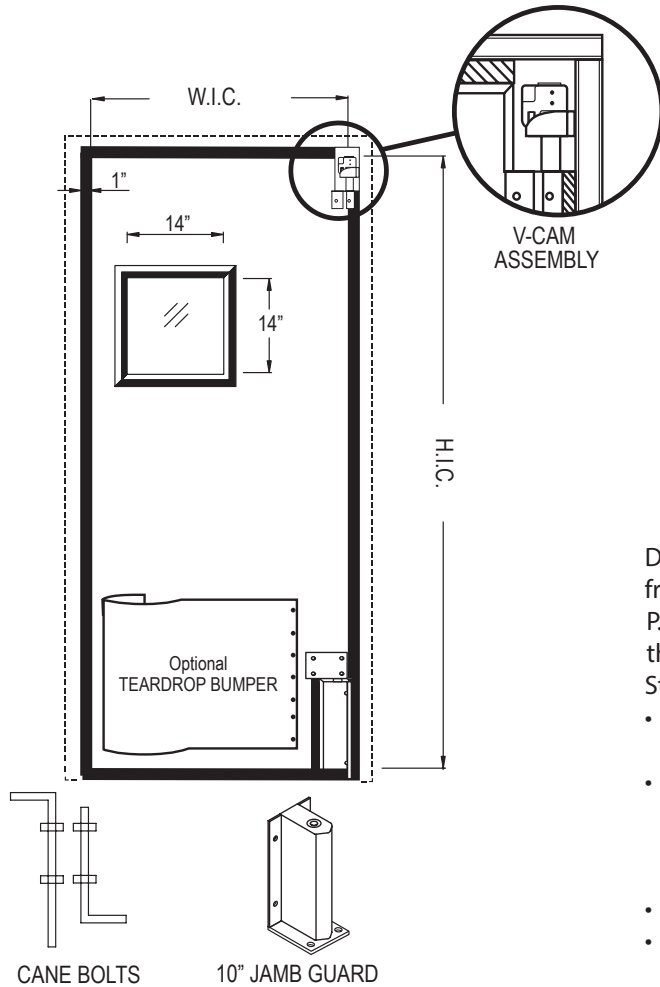

- Doors to be constructed from a custom rigid P.V.C. extrusion with thermo-plastic facings. Standard features are:
- V-Cam Hinge with bottom 10" Jamb Guard.
 - 14"x14" x 1/4" or 10" x 30" 1/4" triple pane gas filled glass window in satin anodized aluminum frame.
 - Fully insulated R 25+
 - 4" Overall thickness

National ACCESS DESIGN LLC
 513-351-3400 fax: 866-300-4539 sales@nationalaccessdesign.com
 NationalAccessDesign.com

DOOR SPECIFICATION			
Opening Width _____ x Height _____			
Qty. _____			
SINGLE PANEL			
L		R	
THERMOPLASTIC FACINGS COLOR OPTIONS			
BLACK	WHITE	BROWN	
BEIGE	RED	GREEN	
LT. GRAY	DK. GRAY		
CANYON BLUE			
TEARDROP BUMPER			
FB12"	FB18"	FB24"	FB30"
FB36"	FB42"	FB48"	
IMPACT PLATES (BLACK ABS STANDARD)			
PL12"	PL18"	PL24"	
PL30"	PL36"	PL42"	
PL48"			
HARDWARE OPTIONS			
CANE BOLTS			
LOCKING COLLARS			
WINDOW OPTIONS			
14" x 14" x 1/4"			
10" x 30" x 1/4"			

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgement forms are signed and returned.

Specification accepted by: _____

Date: _____

NAD ENERGY DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.